


HAMILTON PORCH SWING ASSEMBLY INSTRUCTION

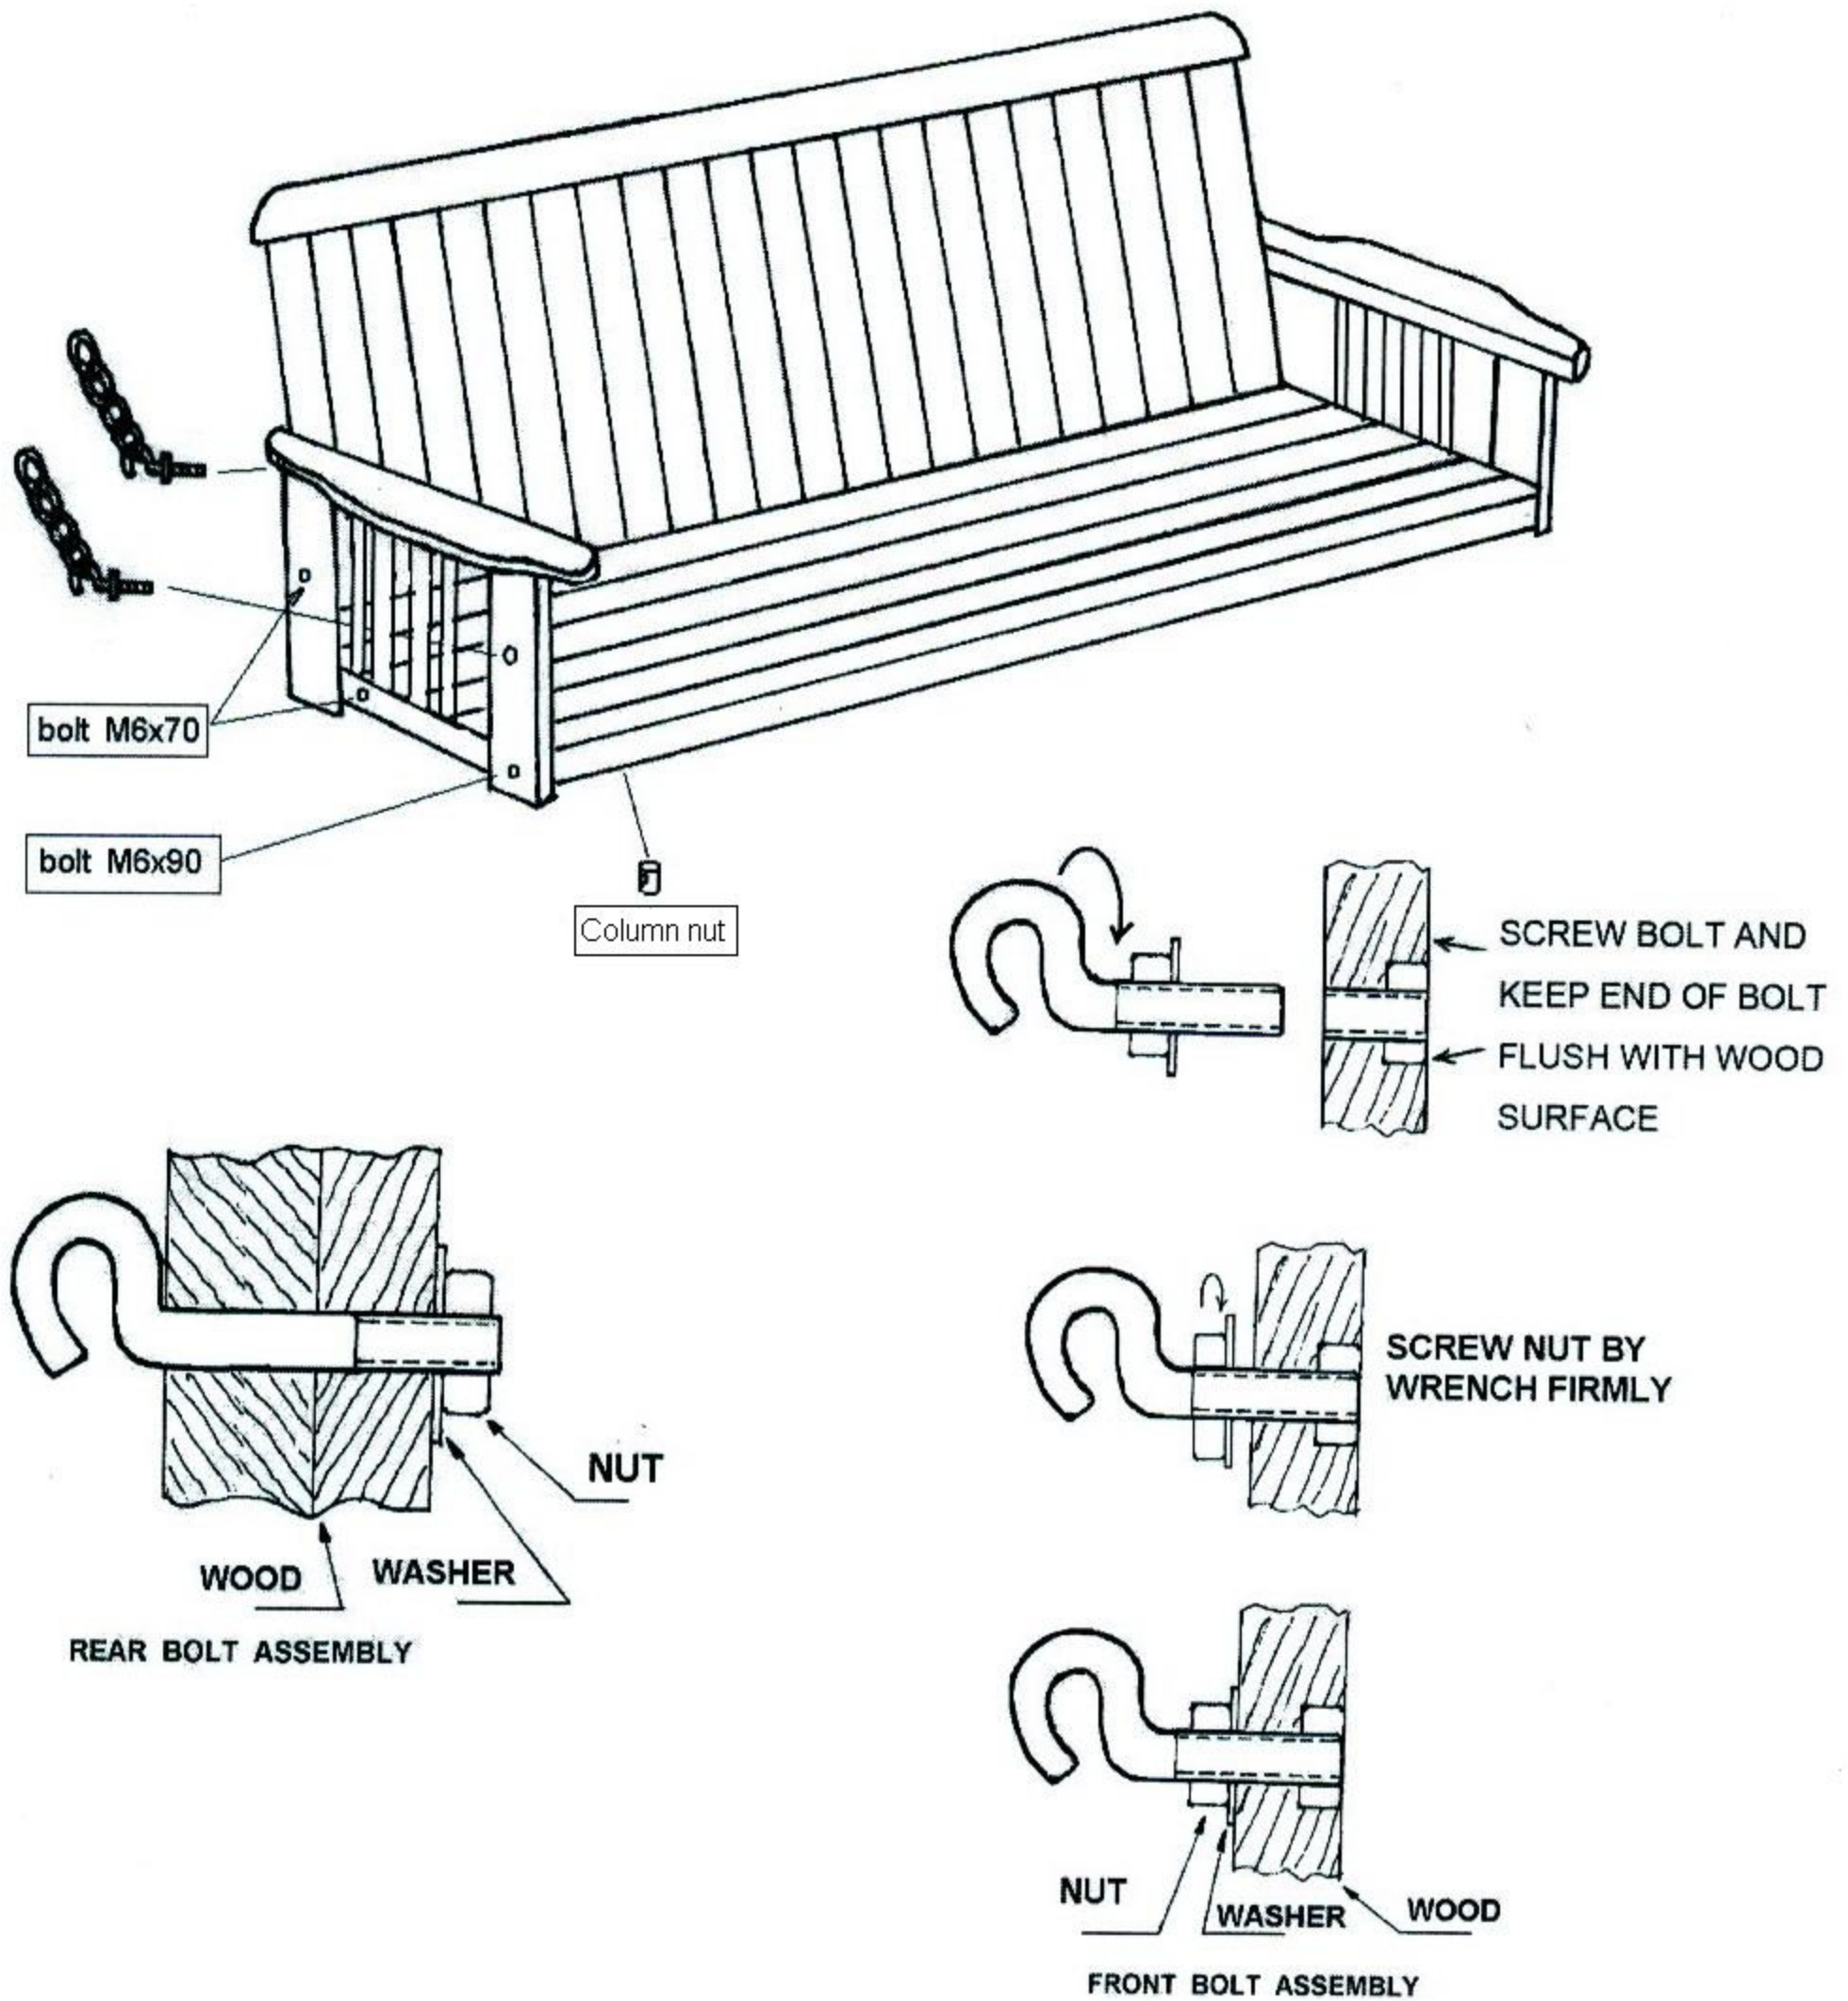

TOOLS NEEDED: ALLEN KEY, WRENCH

LIST OF PARTS: Seat assembly
Back assembly
Arm - 2
Chain hardware - 2 SETS
Bolt M6X70 and Nut - 4
Bolt M6X90 and Column Nut - 2

ASSEMBLY STEPS:

1. Attach the two arms to the seat assembly using bolt M6x70, M6x90 and Column nut.
2. Fit the back assembly to the seat assembly and arm using bolt M6x70.
3. Fix front bolt and rear bolt with chain as per the above sketch.
4. Tighten all bolts, but do not over tighten.
5. After the swing has been exposed to the weather for a period, it may be necessary to re-tighten the bolts.